


Z311


Pedestal Swing Barrier

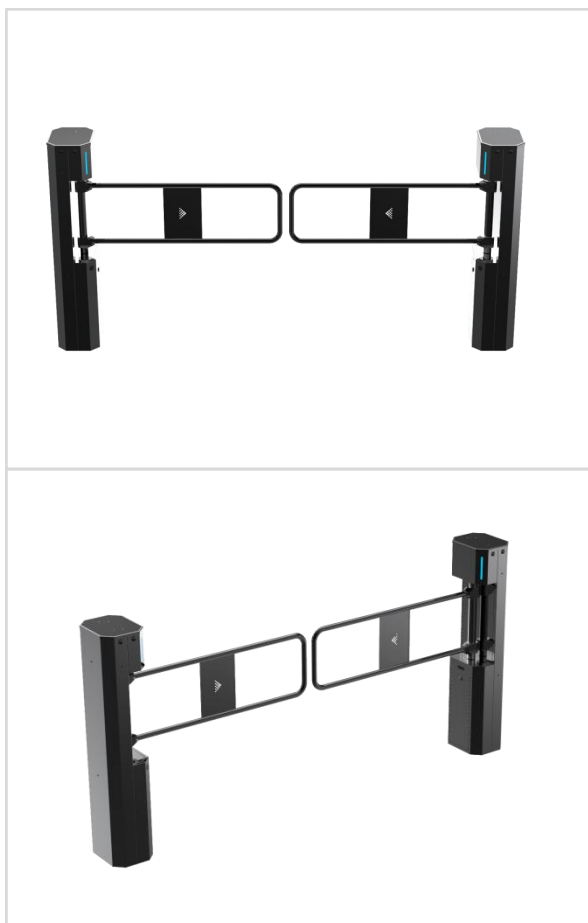

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 Optional features include with function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 Optional features include infrared anti-pinch function and obstacle detection rebound function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

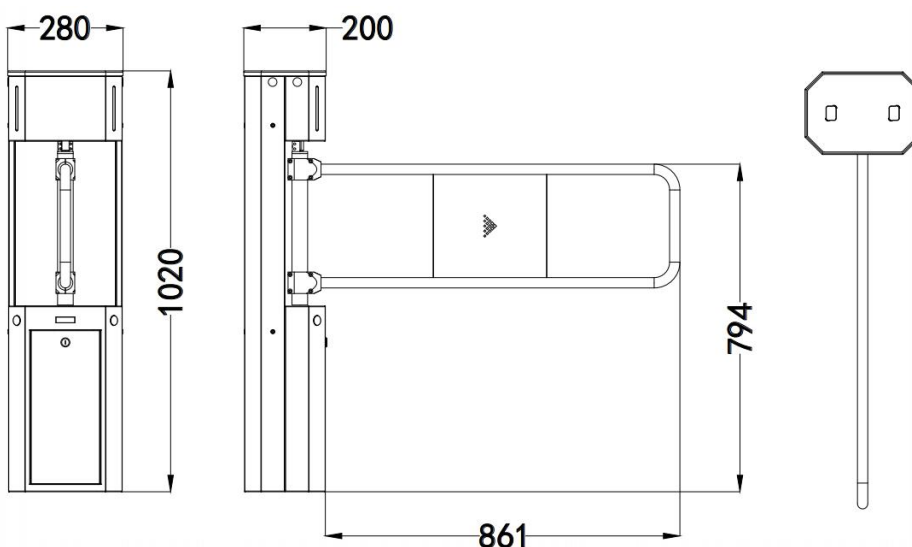

Parameter

Size (L*W*H)	280*200*1020mm
Pass width	600-900mm
Power	50W
Material	Top $\delta=12\text{mm}$ / body $\delta=1.0\text{mm}$ SUS304
Bar Material	0.9mm SUS304
Movement	FD Brushless Integrated Swing Turnstile
Drive Unit	Brushless DC Motor 90K 40W
Power Supply	24V 150W
Control Unit	1V2 Brushless Standard Board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

