

Product model: Z313



Z313 Product Show




FOR A SAFER WORLD.

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 Optional features include with function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 Optional features include infrared anti-pinch function and obstacle detection rebound function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

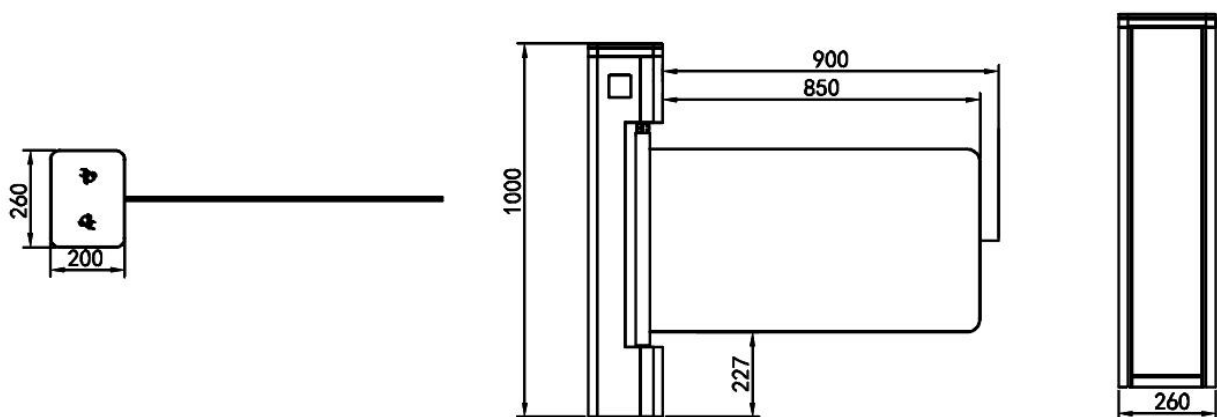

Parameter

Size (L*W*H)	200*260*1000 mm
Pass width	600mm
Power	50W
Material	SUS304
Bar Material	PMMA
Movement	Brushless Swing Gate movement
Drive Unit	Brushless DC Motor 60K 40W
Power Supply	24V 150W
Control Unit	Brushless control system
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share



Turboo Automation Co., Ltd

***Scan our QR
code to follow***



official accounts



Telephone: 86-0755-23305213; 86-0755-29809981;



Head Address : 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134 , Guihua Community,Guanlan Street,Longhua District,Shenzhen ;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi ;

Product model: Z313



FOR A SAFER WORLD.