





Z318 Product Show

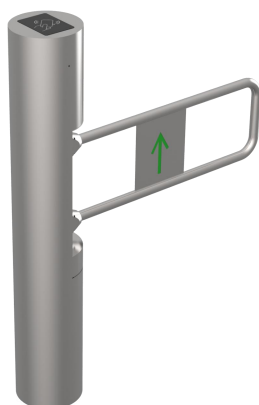

Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 Optional features include with function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 Optional features include infrared anti-pinch function and obstacle detection rebound function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

Product Size

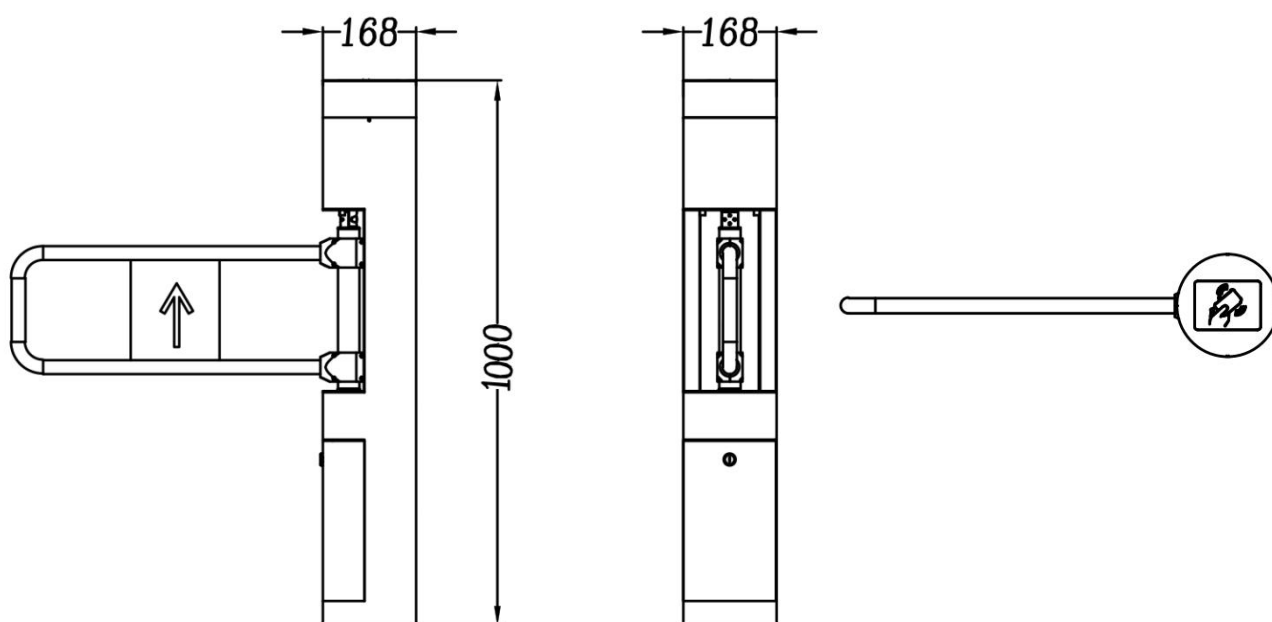

Parameter

Size (L*W*H)	168*168*1000mm
Pass width	600-900mm
Power	50W
Material	δ=2.2mm SUS304 Round tube
Bar Material	SUS304+Green arrow
Movement	FD Cylindrical Brushless Integrated Swing Turnstile
Drive Unit	Brushless DC Motor 90K 40W
Power Supply	24V 150W
Control Unit	1V2 Brushless Standard Board
Communication Interface	Dry contact & RS485
Pass rate	35-50 persons/minute
Temperature	-20°C~+70°C
Humidity	≤90% No condensation

IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share



Turboo Automation Co., Ltd

SCAN OR



Product model: Z318



FOR A SAFER WORLD.