


ES3216F Product show





Single channel

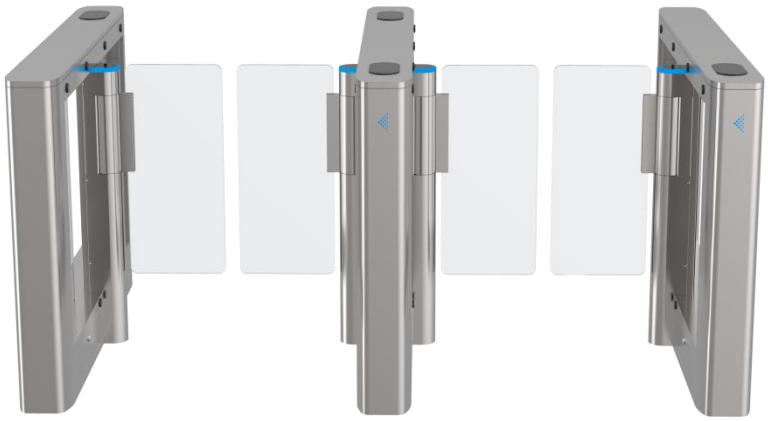



Two channel


Functions & Features

- 1、Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、With functions of anti-tail, anti-reverse pass and so on;
- 3、Card can be set "with memory" or "without memory" functions;
- 4、With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、With infrared anti-clip function (anti-clip when gate is open or running);
- 6、Compatible with IC, ID card, scanning and face recognition,etc.
- 7、Two modes of operation are available: open or closed.
- 8、Various working modes are available, including two-way card reading and one-way card reading,etc.

Size drawing

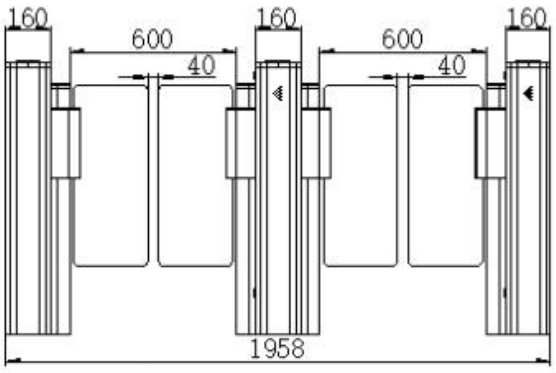

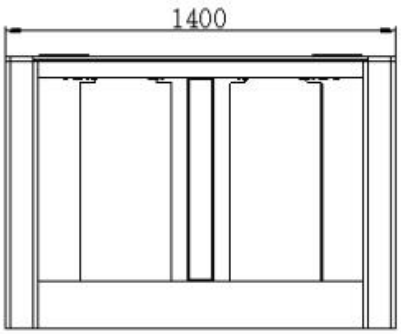

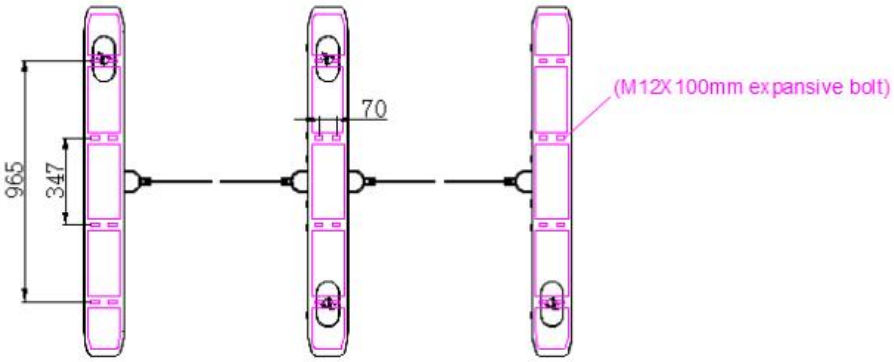

Parameter

Size（L*W*H)	1400*160*980mm
Material	Top δ=1.2mm/ body δ=0.9mm SUS304
Filling panel material	10mm Transparent acrylic+RGB light
Arm material	Acrylic+RGB light (optional)
Pass width	600-900mm
Height from ground (upper part)	820mm
Height from ground (lower part)	200mm
Movement	Brushless speed gate / Brushless servo (Optional)
Power supply	24V 150W
Input voltage	AC100V~240V,50/60HZ
Drive unit	Brushless motor
Pass rate	35-50 persons/minute
Open speed	0.5s/1.5s
Sensor	6 pairs
Indicator light	RGB light
Control unit	1V2 Brushless standard board
Noise	≤65dB
Temperature	-20℃~+70℃
Humidity	≤90% No condensation
IP	IP4X
Environment	Indoor and outdoor (outdoor with canopy)

Case share



Turboo Automation Co.，Ltd

Scan our QR code to follow

offcial accounts

Telephone：86-0755-23305213；86-0755-29809981；

Head Address： 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134， Guihua Community,Guanlan Street,Longhua District,Shenzhen ；

Production base： Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi ；