




ES3216S Product show



Single channel

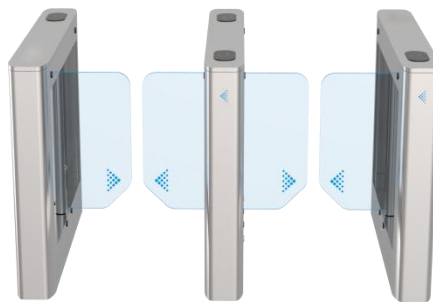


Two channel

Functions & Features

- 1、 Reasonable and reliable design,low noise,smooth operation and long service life;
- 2、 With functions of anti-tail,anti-reverse pass and so on;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function,i.e. after having access to the gate,the gate automatically restores to the locked state if not pass within the time set;
- 5、 With infrared anti-clip function (anti-clip when gate is open or running);
- 6、 Compatible with IC,ID card,scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available,including two-way card reading and one-way card reading,etc.

Size drawing

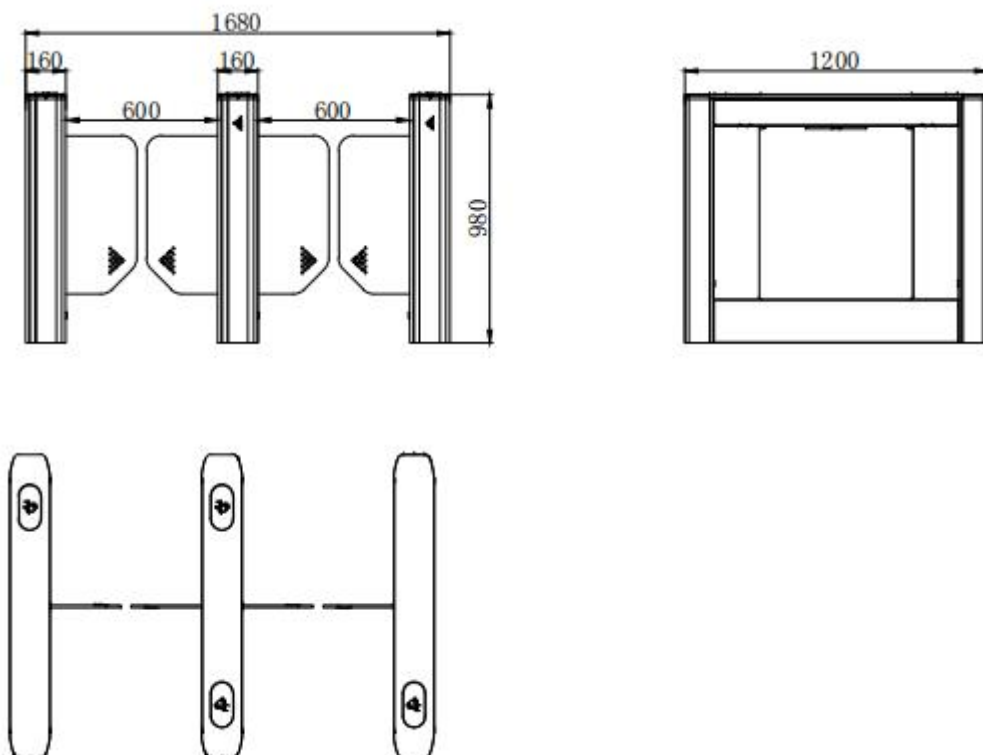

Parameter

Size (L*W*H)	1200*160*980 mm
Material	Top δ =1.2mm / body δ =0.9mm SUS304
Filling panel material	10mm Transparent acrylic+RGB light
Arm material	Acrylic+RGB light (optional)
Pass width	600-900mm
Height from ground (upper part)	820mm
Height from ground (lower part)	200mm
Movement	Brushless integrated swing barrier
Power supply	24V 150W
Input voltage	AC100V~240V,50/60Hz
Drive unit	Brushless motor
Pass rate	35-50 persons/minute
Open speed	0.5s/1.5s
Sensor	4 pairs
Indicator light	RGB light
Control unit	1V2 Brushless standard board
Noise	≤ 65 dB
Temperature	-20°C~+70°C
Humidity	$\leq 90\%$ No condensation
IP	IP54
Environment	Outdoor

Case share



Turboo Automation Co., Ltd

***Scan our QR
code to follow***



official accounts

 Telephone: 86-0755-23305213; 86-0755-29809981;

 Head Address: 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134,Guihua Community,Guanlan Street,Longhua District,Shenzhen ;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park,National High-tech Zone,Fuzhou City,Jiangxi