

Product model: M3620AB



M3620AB Product Show




Functions & Features

FOR A SAFER WORLD.

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With functions of anti-tail, anti-reverse pass and so on;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 With infrared anti-clip function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

Size drawing

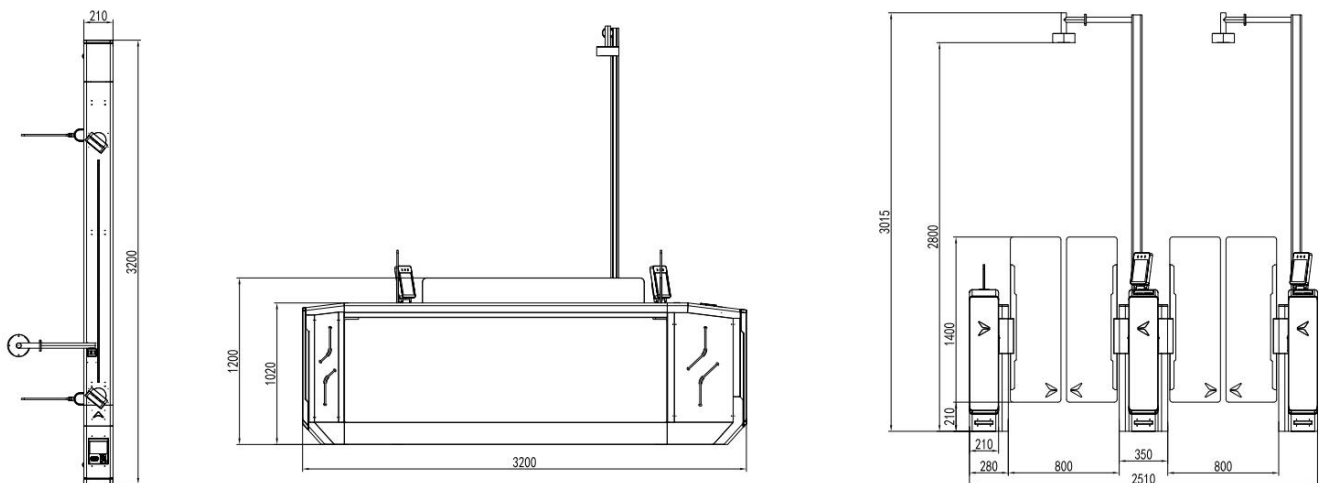

Parameter

Size	3200*210*1020 (mm)		
Chassis	Description	Norm	Model/Brand
	Top cover	2.0mm	cold roller with power coated
	Housing	2.0mm	cold roller with power coated
	Filling Panel	10mm	/
Movement	Description	Norm	Model/Brand
	Mechanism	Servo sliding gate	/
	Door panel	10mm	Transparent PC
	Pass Lane	600-900mm	Transparent PC
Electronic control	Description	Norm	Model/Brand
	Control board	Servo standard board+AB linkage	/
	Motor	Brushless servo 40:1 100W	/
	IR sensor	Light Curtain 64 Points+20 pairs +3D Visual Module	ZY+HND
	Air switch	2P	ZT
	Power supply	24V 500W /12V 150W	MW
Accessories	Description	Norm	Model/Brand
	Connection cable	5m	2*1.0m m ² RVV
	Network cable	5m	Both ends with crystal tips
Package	Description	Norm	Model/Brand
	Pearl cotton	Foam liner	/
	Cardboard box	3260*270*1080	Carton (inner dimensions)

Case share



Turboo Automation Co., Ltd

***Scan our QR
code to follow***



official accounts

 Telephone: 86-0755-23305213; 86-0755-29809981;

 Head Address : 1st-4th Floor,Building#1,Guanjie Factory area,guanguang Road #1134 , Guihua Community,Guanlan Street,Longhua District,Shenzhen ;

Production base: Factory Building No.1,Zhongzhi Science and Technology Park ,National High-tech Zone,Fuzhou City,Jiangxi ;